

SAFER-R

SAFER HIGH CAPACITY ROUND STOCK LIFTER

Increased round stock capacity with larger V poles creating better surface contact for round stock and good versatility with flat stock when needed.


Safer R has a higher capacity on round stock compared to general purpose or thin system lifters.

Features

- Bigger V shape pole shoes than standard SAFER to ensure safer conditions on round stock
- Higher performance on rounds than general purpose lifters
- More stability on rounds
- Good flat stock capacity
- "SAFER" 1/2 Power test lift feature

Applications

Round or flat, the "safest" way to handle a load.

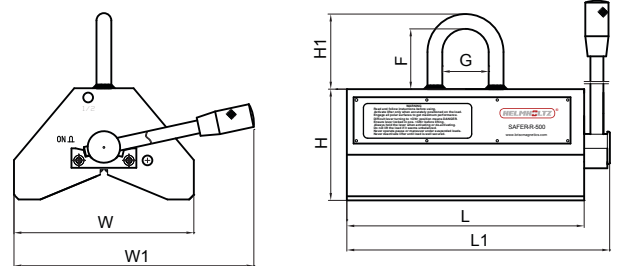

Specifications

mm(inch)

Model	Size	Width(W)	Length(L)	Height(H)	H1	W1	L1	G	F	Net Weight
SAFER-R	250	123 (4.84)	152 (5.98)	108 (4.25)	81 (3.19)	230 (9.06)	178 (7.01)	50 (1.97)	65 (2.56)	11 kg / 24 lb
SAFER-R	500	194 (7.64)	256 (10.08)	120 (4.72)	81 (3.19)	230 (9.06)	284 (11.18)	50 (1.97)	65 (2.56)	28 kg / 62 lb
SAFER-R	1000	280 (11.02)	316 (12.44)	185 (7.28)	112 (4.41)	315 (12.40)	344 (13.54)	64 (2.52)	92 (3.62)	90 kg / 198 lb
SAFER-R	2000	370 (14.57)	484 (19.06)	240 (9.45)	112 (4.41)	510 (20.08)	521 (20.51)	64 (2.52)	92 (3.62)	200 kg / 440 lb
SAFER-R	3000	440 (17.32)	550 (21.65)	285 (11.22)	125 (4.92)	610 (24.02)	596 (23.46)	70 (2.76)	100 (3.94)	350 kg / 770 lb

Load Capabilities

mm(inch)

Model	Size	Flat load Max	Min Thickness	Max Length	Load Round Max	Round Min Diameter	Round Max Diameter
SAFER-R	250	250 kg/550 lb	20 (0.79)	1500 (59.06)	150 kg/330 lb	60 (2.36)	200 (7.87)
SAFER-R	500	500 kg/1100 lb	25 (0.98)	2000 (78.74)	300 kg/660 lb	60 (2.36)	300 (11.81)
SAFER-R	1000	1000 kg/2200 lb	40 (1.57)	3000 (118.11)	500 kg/1100 lb	80 (3.15)	360 (14.17)
SAFER-R	2000	2000 kg/4400 lb	55 (2.17)	3000 (118.11)	1000 kg/2200 lb	80 (3.15)	460 (18.11)
SAFER-R	3000	3000 kg/6600 lb	70 (2.76)	3500 (137.8)	1500 kg/3300 lb	100 (3.94)	560 (22.05)